



WWW.ARKENOPTICSUSA.COM



SH-4J^{GenII} OWNERS MANUAL

► 6-24X50


WWW.ARKENOPTICSUSA.COM


Our Mission:

Arken products are designed to combine quality, performance, and precision with tremendous value. The SH-4J raises the bar, now coming standard with Japanese ELD glass and choice of reticle (VPR or VHR). Like its predecessor, The SH-4J incorporates adjustable elevation and windage turrets with tactile and audible clicks. These turrets offer 8 MILS/20 MOA per revolution.

SH-4J GENII 6-24X50 Specifications

Reticle Position: First Focal Plane
 Objective Diameter: 50 mm
 Turret Size: 34 mm
 Turret Adjustment: 1/10 MIL (1/4 MOA)
 Zero Stop: AZS - Arken Zero Stop
 Reticle: VPR / VHR
 Illuminated: RED
 Eye Relief: 3-5 in
 FOV: 20.88- 5.22 ft @ 100 Yards
 Elevation Range: 32 MIL (108.8 MOA)
 Windage Range: 10 MIL (34.4 MOA)
 Adj/Revolution: 8 MIL (20 MOA)
 Parallax Adjustment: 25 Yrds-Infinity
 Weight: 36.6 oz

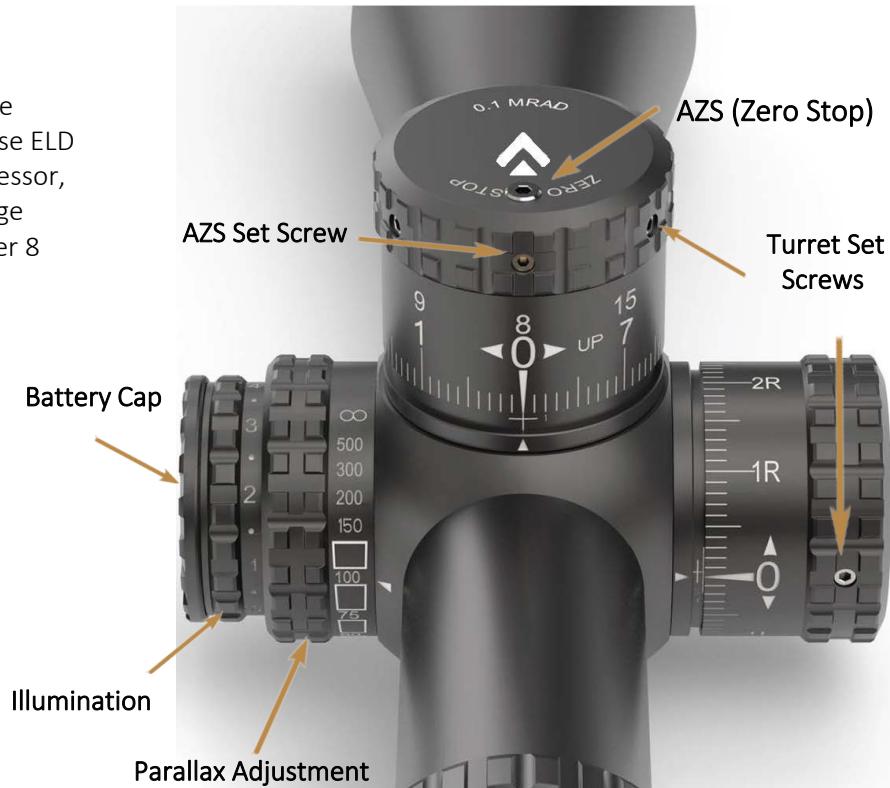

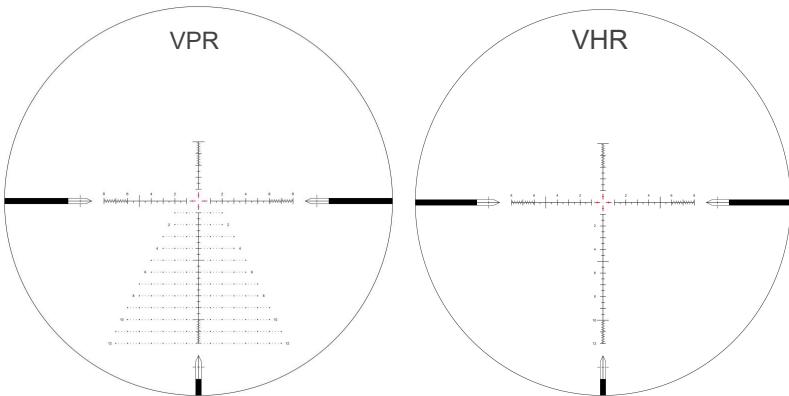

Reticle Focus Adjustment:

To adjust reticle focus, rotate the Reticle Focus Ring while looking at an unobstructed background. The eye will continually refocus, so this should be done in short bursts. Look away between each adjustment. The reticle should be sharp and should not appear to move with small head adjustments. Once properly set, the eye should not have to work to get the reticle in focus.

Parallax Adjustment:

To eliminate parallax, rotate the Parallax Adjustment Turret. Proper adjustment will eliminate all reticle movement within the eye box.

Variable Power Adjustment:

To obtain the desired magnification, rotate the Magnification Ring so that the indicator on the Ring corresponds with the magnification power level on the ocular housing.



Arken Zero Stop (AZS) & Turret Alignment

The **Arken Zero Stop (AZS)** allows the shooter to quickly and consistently return the elevation turret back to the sight in distance or "0".

Please use the 2mm allen wrench to loosen the **AZS Set Screw** on the **elevation** turret and raise the **AZS Zero Stop**.

1. 'Slip' the turrets: (For both Elevation & Windage Turrets) Hold the turret in place to ensure the turret does not move during this process. Please use the 2mm alien wrench to loosen the **THREE** turret cap retaining screws on the **SIDE** of the turret. This will allow the turret to spin freely without rotating the internal components of the turret.
2. Set Turrets to Zero "0":
Rotate the turret cap to align the "0" indicator mark of the turret cap with the indicator mark on the scope tube. Carefully, tighten the **THREE** retaining screws on the **SIDE** of each turret cap.
3. Set the AZS (Arken Zero Stop)
Rotate the turret UP 2 clicks. Gently, turn the AZS located on **TOP** of the elevation turret clockwise to lower until you feel the AZS bottom out. Then, loosen the AZS a quarter turn to alleviate any tension. Finally, tighten the AZS Set Screw against the AZS.
4. Rotate the turret back to Zero "0".

AZS IS SET. You should have a Arm stop that allows you to consistently return to zero.

The Subtension Scale: MIL or MOA:

Depending on which version you have purchased, your SH-4J riflescope will feature elevation/windage adjustments and reticles scaled in either MOA or MRAD (MIL). If you are unsure of which scale you have, reference the top of the elevation turret. Both unit of arc scales are effective at ranging and/or adjusting for bullet trajectory. For best results, the user must understand either system being employed. We recommend understanding both.

MRAD (Milliradian): 1/1000th of 1 radian of arc

1 MIL= 3.438 MOA

1 MIL= 3.599 inches@ 100 yards

1/10 MIL= 0.359 inches@ 100 yards

MRAD

100 yd	200 yd	300 yd	400 yd	500 yd	600 yd	700 yd	800 yd
3.6"	7.2"	10.8"	14.4"	18"	21.6"	25.2"	28.8"

MOA (Minute of Angle): 1//60th of 1 degree of arc 1

MOA= 1.047 inches@ 100 yards

¼ MOA= 0.261@ 100 yards.

MOA

100 yd	200 yd	300 yd	400 yd	500 yd	600 yd	700 yd	800 yd
1"	2"	3"	4"	5"	6"	7"	8"